

## GU10 energy saving kit (downlighter)



\* ENERGY SAVING KIT consisting of 1 recessed orientable downlight and one Duralux GU10 lamp.

\* The recessed element can only be used with the Duralux GU10, also 11W and 13W.

\* Can be mounted on inflammable surfaces.

\* Double insulation.

\* Cuthole 70 mm.

\* Colour temperature choice.

\* Suitable for replacing appliances with existing dichroic lamps using the same holes, thus optimizing management costs: reduction of energy consumption and excess light.

### Item Characteristics

Code	06990/INW
Lamp Voltage	230 V
Nominal Power	9 W
Base	GU10
Lamp Current	0,07 A
Light Tonality	Homelight
Colour temperature	2700 K
Opening beam	FLOOD
Diameter	80 mm
Lenght	106 mm
Colour	White
Tube Geometry	TWIST



### Performance

Photometry	F27
Irc/Ra	>80
Lifetime	10000 h
Energy Class	
kWh/1000h	9

### Tech Info

Dimmable	NO
Power Factor	0,55
Fulfilled Directives and norms	2006/95/CE * Bassa Tensione 2004/108/CE * Compatibilità Elettromagnetica 2011/65/UE * RoHS 2002/96/CE * RAEE EN 60968 * Fascicolo 7287C, Anno 2004 EN 61547 * Fascicolo 10286, Anno 2010 EN 55015 * Fascicolo 9308, Anno 2008 EN 61000-3-2 * Fascicolo 8802, Anno 2007 EN 61000-3-3 * Fascicolo 9968, Anno 2009 EN 60598-1 EN 60598-2-2 2010/30/EU * Energy Consumption 874/2012 * Regulation for Energy Labelling

### Spectroradiometry and Photometry

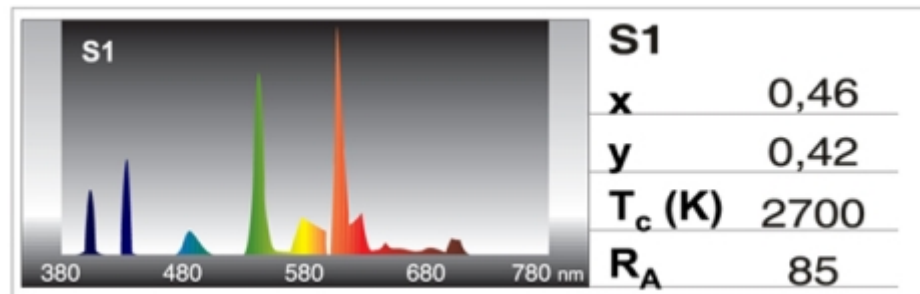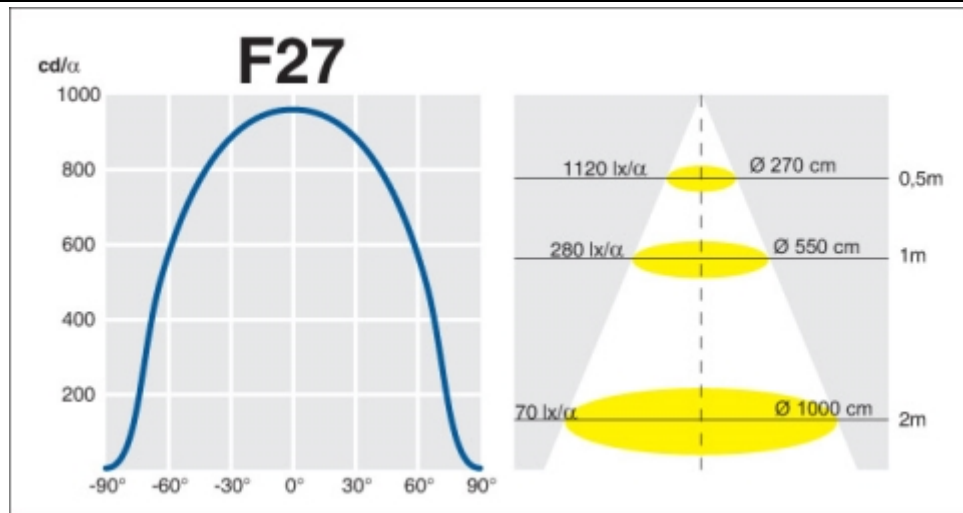

### Shipping info

Item barcode	8011905826314
Pack	6 pz
Master barcode	8011905771591