

DURALUX D



- * Base: G24d, 2 pins.
- * Starter and noise-suppressor incorporated in the cap.
- * Compact Fluorescent Lamps for magnetic ballast: ideal for optimizing space
- * Triphosphor powders.
- * Excellent control of colour temperature and of colour rendering.
- * Cannot be used with light dimmers.
- * Energy savings of 80% compared to the light emission of incandescent lamps.

Item Characteristics

Code	02067
Lamp Voltage	63,7 V
Nominal Power	10 W
Rated Power	9,9 W
Base	G24d-1
Lamp Current	0,185 A
Nominal Flux	600 LUMEN
Rated Flux	600 LUMEN
Light Tonality	Cool light
Colour temperature	6000 K
Diameter	40 mm
Lenght	118 mm


Performance

Irc/Ra	>80
Lifetime	10000 h
Rated lamp efficacy	60 lm/W
Energy Class	B
kWh/1000h	13

Tech Info

Dimmable	NO
Operating Position	360°
Mercury (mg)	2,5
Lamp survival factor at 2000h	100%
Lamp survival factor at 4000h	95%
Lamp survival factor at 6000h	80%
Lamp survival factor at 8000h	70%
Lamp survival factor at 12000h	45%
T (°C) Working environment Temp.	-15°C / +35°C
Fulfilled Directives and norms	2006/95/CE * Bassa Tensione 2009/125/CE * Progettazione Eco Compatibile 2011/65/UE * RoHS 2012/19/UE * RAEE EN 61199 * anno 2012 EN 61199+A1 * anno 2013 245/2009 * Progettazione Eco Compatibile 347/2010 * Progettazione Eco Compatibile 2010/30/EU * Energy Consumption 874/2012 * Regulation for Energy Labelling

Spectrocolorimetry and Photometry

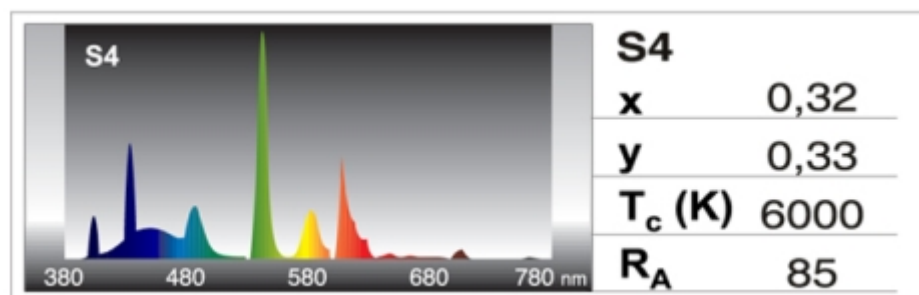

Shipping info

Single pack dimensions L x H x D (mm)	146 x 35 x 35
Item barcode	8011905801236
Pack	50 pz
Inner pack dimensions L x H x D (mm)	370 x 185 x 156
Master barcode	8011905711443
Master pack dimensions L x H x D (mm)	400 x 400 x 330