

TUBOLED GLASS LL6 - 50.000h



- * LED tubes with glass cover.
 - * Wide lighting distribution curve.
 - * Color rendering > 80.
 - * Operating voltage 220-240V.
 - * Working position: universal.
 - * Replacing 18W, 36W and 58W T8 tubes: high energy saving.
 - * Immediate switch on, no flickering or buzzes.
 - * Great flux maintenance.
- USAGE INFORMATION

- * Do not use with dimmers.
- * In case fluorescent tubes must be replaced, follow the simple assembly instructions indicated below. See instruction on the website.
- * Do not use in installations in series.
- * Package: industrial pack of 10pcs that can be sold separately.

Item Characteristics

Code	L36830LL6
Lamp Voltage	220-240 V
Nominal Power	18 W
Base	G13
Lamp Current	0,086 A
Nominal Flux	2200 LUMEN
Light Tonality	Warm white
Colour temperature	3000 K
Opening beam	300°
Diameter	28 mm
Lenght	1200 mm
Weight	238 g


Performance

Photometry	F111
Irc/Ra	>80
Lifetime	50000 h
Energy Class	A+
kWh/1000h	18

Tech Info

Dimmable	NO
Number of ON-OFF cycles	100000
Power Factor	0,96
Warm-up time up to 60 % of the full light output	Instant Full Light
Lamp start time	<0,2s
Mercury (mg)	0
LLMMF - Lamp lumen maintenance factor	70
T (°C) Working environment Temp.	-25°C / +35°C
Fulfilled Directives and norms	2009/125/EC * Ecodesign 1194/2012 * Regulation for Ecodesign 2015/1428 * Regulation for Ecodesign 2010/30/EU * Energy Labelling 874/2012 * Regulation for Energy Labelling 2011/65/EU * RoHS 2012/19/EU * RAEE 2014/30/EU * EMC (Compatibilità Elettromagnetica) 2014/35/EU * LVD (Bassa Tensione) CEI EN 55015:2014 (+A1:2016) CEI EN 60598-1:2015 (+EC:2015/+EC:2016) CEI EN 60598-2-1:1997 CEI EN 61000-3-2:2015 CEI EN 61000-3-3:2014 (+EC:2014/+EC:2016) CEI EN 61347-1:2016 CEI EN 61347-2-13:2015 CEI EN 61547:2010 CEI EN 62031:2009 (+A1/+A2:2015) CEI EN 62471:2010 IEC/TR 62471-2:2009 CEI EN 62493:2015 CEI EN 62776:205 CEI 34-141:2014 Risk Group 0

Spectrocolorimetry and Photometry

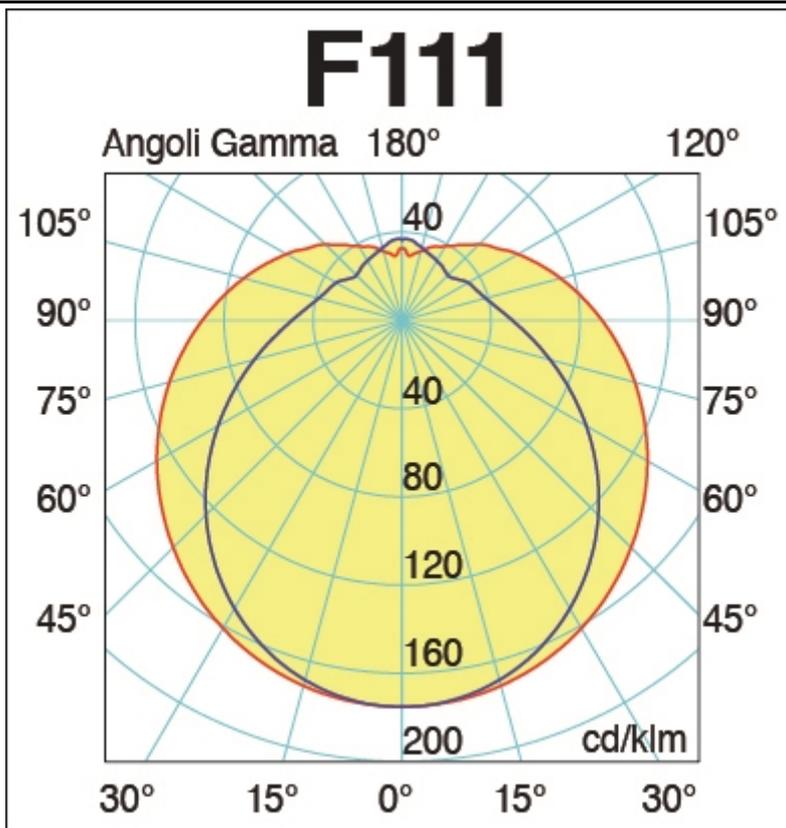

Eulumdat file for lighting calculations available on the website

All parts of this document are Duralamp ownership. All rights reserved. This document and the included information are provided without any responsibility deriving from mistakes or omissions. No part of this document can be cut, reproduced or used without written authorization. Duralamp maintains the right to change the included data without notice due to improvements of the products.

Shipping info

Single pack dimensions L x H x D (mm)	1270 x 39 x 39
Item barcode	8011905862190
Pack	10 pz
Master barcode	8011905862206